




CATALOG NUMBER: 19723R02 and 19733R02
PRODUCT DESCRIPTION: Construction-site portable power distribution box
NRTL APPROVAL: c(UL)us Listed to UL 1640 and CAN/CSA C22.2 No. 14
UPC: 0 29892 02987 6 (19723R02)
 0 29892 67322 2 (19733R02)

PRODUCT DESCRIPTION

Power inlet: 50A 125/250V California Standard twist-to-lock flanged inlet with integral cover
Power outlets: (1) 50A 125/250V California Standard twist-to-lock receptacle
 (1) NEMA L6-30R 30A 250V twist-to-lock receptacle (19723R02)
 (1) NEMA L14-30R 30A 125/250V twist-to-lock receptacle (19733R02)
 (6) NEMA 5-20R 20A 125V straight-blade receptacles
Over-current protection: 20A receptacles - 20A circuit breaker for each receptacle
 30A receptacle - 30A circuit breaker for each ungrounded conductor
 50A receptacle - none
Ground fault protection: Individual automatic reset Class A GFCI for each 20A receptacle
Over-voltage protection: Provided by GFCI on each 20A receptacle

Enclosure type: NEMA Type 3R, rainproof
Enclosure material: 16 ga galvanized steel with Safety Yellow powder coat finish
Roll cage: Carbon steel tubing, with black powder coat finish
Receptacle covers: Thermoplastic, on all receptacles
Receptacle cover colors: Black, except gray for the 30A receptacle
Weight (approx): 38 lbs.

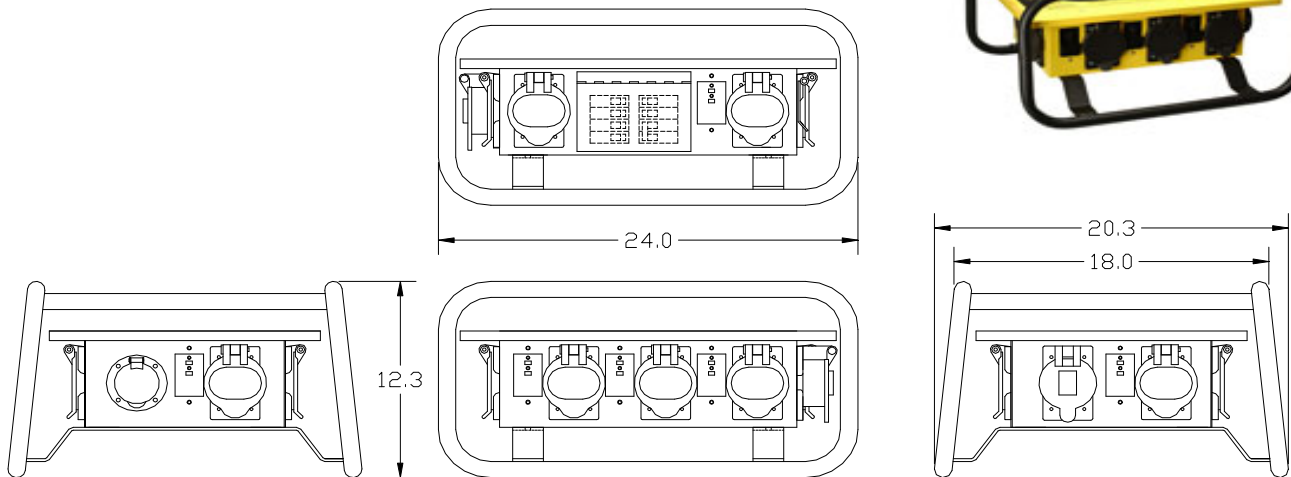

The information presented here is, to the best of our knowledge, true and accurate. However, since conditions of use are beyond our control, all recommendations or suggestions are presented without guarantee or responsibility on our part.

We disclaim all liability in connection with the use of information contained herein or otherwise.

This specification is the proprietary intellectual property of Southwire Company LLC. Any information contained herein shall not be disclosed to any party without the written consent of Southwire Company LLC.